


EPSON®

TM-P60 INKJET PRINTER

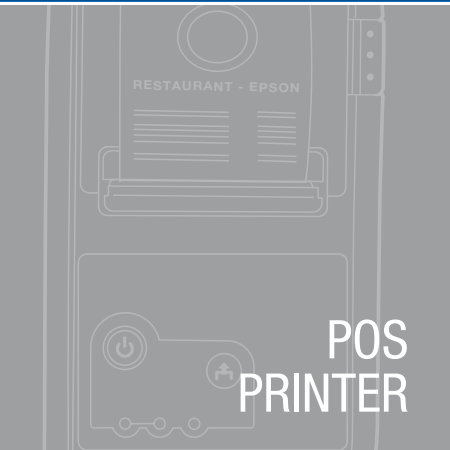

The Mobile Wireless Printer

The TM-P60 is designed to meet the needs of both retail and hospitality for high-speed, portable thermal receipt printing.

- Long battery life
- High durability
- High speed printing with autocutter
- Easy operation
- Makes use of proprietary applications
- Supports wireless LAN IEEE802.11b interface
- Available for a wide range of printing



EPSON®

POS
PRINTER

TM-P60 INKJET PRINTER

Specifications



670g

EPSON AUSTRALIA
CUSTOMER SERVICE LINE
Tel: 1300 304 767

VISIT OUR WEBSITE:
www.epson.com.au

HEAD OFFICE
SYDNEY
3 Talavera Road
North Ryde, NSW 2113
Tel: (02) 8899 3666

ABN 91 002 625 783
11/04

The EPSON TM-P60 – New Mobile Wireless Printer

The EPSON TM-P60 can go anywhere you need it to go. Built with EPSON's famous quality and reliability, the EPSON TM-P60 is designed to meet the needs of both retail and hospitality for portable high-speed, thermal receipt printing.

Long Battery Life

The EPSON TM-P60 offers an industry-leading 12-hour battery life* - long enough for a full shift of on-the-go receipt and order printing.

*The battery life differs depending on the system environment.

High Durability

The EPSON TM-P60 is built to survive drops from 1.2m.



High Speed Printing with Autocutter

The EPSON TM-P60 offers clear, high-speed thermal printing with a printing speed up to 70mm/sec and is equipped with an autocutter.

Make Use of Proprietary Applications

The EPSON TM-P60 implements ESC/POS® command system and is compatible with EPSON's popular TM-T88 series printer, meaning that current applications written for EPSON TM-T88 series printers can be used with the EPSON TM-P60 with minimum modification. EPSON TM-P60 also supports industry standards with OPOS, JavaPOS and Windows® drivers available.

Easy Operation

With one-hand paper and battery replacement, the EPSON TM-P60 is so easy to use, it requires almost no training.

Available for a Wide Range of Printing

The EPSON TM-P60 is designed to meet a wide range of printing needs, such as:

- payment at restaurant tables
- processing transactions of customers waiting in queues, during busy periods in department stores and fast food restaurants
- mobile points of sale

PRINT METHOD	Thermal line printing
PRINT FONT	Font 12 x 24 / 10 x 24 / 8 x 16
COLUMN CAPACITY (COLUMNS)	35 / 42 / 52 (58 mm), 36 / 43 / 54 (60 mm)
CHARACTER SIZE	1.50mm(W) x 3.0mm(H) / 1.25mm(W) x 3.0mm(H) / 1.0mm(W) x 2.0mm(H)
CHARACTER SET	95 Alphanumeric, 48 International, 128 x 10 Graphic
BAR CODE	UPC-A, UPC-E, JAN8 (EAN), JAN13 (EAN), CODE39, CODE93, CODE128, ITF, CODABAR
CHARACTERS PER INCH	16 / 20 / 25 cpi
INTERFACES	IEEE 802.11b, RS-232
DATA BUFFER	128 bytes
PRINT SPEED	Maximum 70mm / s
PAPER DIMENSIONS	57.5mm ± 0.5mm(W) x diameter 51.0mm (max.) (59.5mm ± 0.5mm(W) by removing the spacer)
THICKNESS	0.05 mm to 0.08 mm

OPERATING TEMPERATURE	0 to 50°C
BATTERY CAPACITY	12 hours (depending on the system environment)
RELIABILITY	MTBF 120,000 hours MCBF 16,000,000 lines
AUTOCUTTER LIFE	500,000 cuts
OVERALL DIMENSIONS	103mm(W) x 159mm(D) x 65mm(H)
WEIGHT (APPROX.)	670g (including battery)
EMC STANDARDS	FCC class B
POWER SUPPLY (OPTION)	PS-10
ACCESSORIES	Li-ion battery pack LIP-2500 x 1, Roll paper diameter 40mm x 1
OPTION	QUICK CHARGER OT-CH60, RS-232 cable: OT-RS60 SPARE BATTERY LIP-2500
SAFETY STANDARDS	UL / CSA
WARRANTY	12 months